

■ **APPLICATIONS:** Drainage of construction site and subway, flood control/prevention of public construction, irrigation, water circulation of aquaculture and landscape pond...etc.



BA-103A



BA-208A




BA-205B



BA-437A

#### ■ FEATURES

1. Mini size, lightweight and superior to same grades of other pumps.
  2. Motor frame, shaft and screws are made of high strength stainless-steel.
  3. Good performance, high water volume and energy saving, high wear-resistant mechanical seal and oil seal are adopted to maintain long time operation.
  4. Dependable laminated sheet of Si steel is adopted to motor; shaft and rotor are machining precisely to raise stability and efficiency of motor.
  5. Inner cable wires and cable base are upgraded by filling EPOXY to raise humidity-resistance.
  6. The product range is up to 15Hp, **dual SIC mechanical seals** are built in (**1½ Hp and above**), and stress eliminating design is adopted (**10Hp and above**) to raise operating efficiency.
  7. Superior design to easily disassemble motor and pump housing for maintenance.
- Float switch is available for model under 2Hp (except BA-205B 3phase).


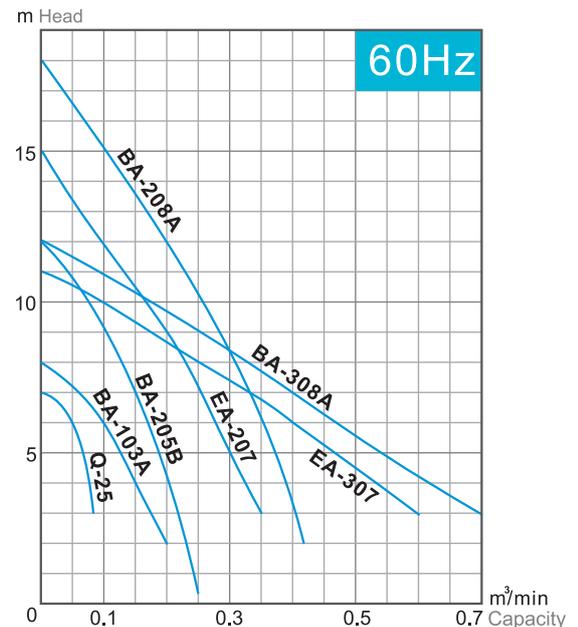


#### SPECIFICATIONS

2P-3600RPM

Model	Output Hp (kW)	Discharge inch	Phase $\phi$	Standards		Length mm	Width mm	Height mm	Weight kg
				Head m	Capacity m <sup>3</sup> /min				
Q-25	0.2 (0.15)	20/25mm	1 $\phi$	6	0.05	165	130	275	7
BA-103A	1/2 (0.4)	1 1/2"	1 $\phi$	6	0.1	200	140	340	9
BA-205B	(0.5)	2"	1 $\phi$ / 3 $\phi$	8	0.13	230	160	345	14.5
EA-207	1 (0.75)	2"	1 $\phi$ / 3 $\phi$	9	0.2	250	180	460	19
EA-307	1 (0.75)	3"	1 $\phi$ / 3 $\phi$	6	0.4	290	180	460	20
BA-208A	1½ (1.1)	2"	(1 $\phi$ 220v) / 3 $\phi$	12	0.2	250	180	480	24
BA-308A	1½ (1.1)	3"	(1 $\phi$ 220v) / 3 $\phi$	7	0.4	310	220	500	25

■ **APPLICATIONS:** Drainage of construction site and subway, flood control/prevention of public construction, irrigation, water circulation of aquaculture and landscape pond...etc.

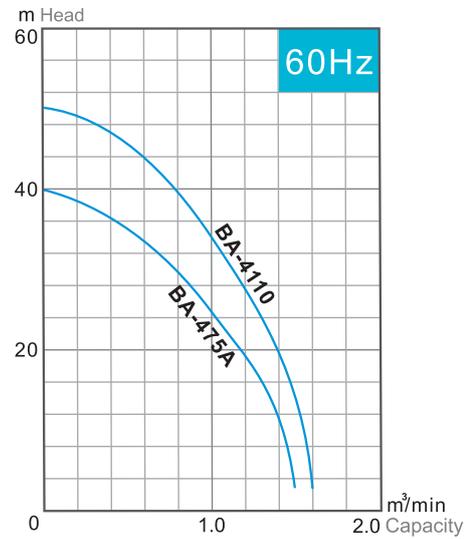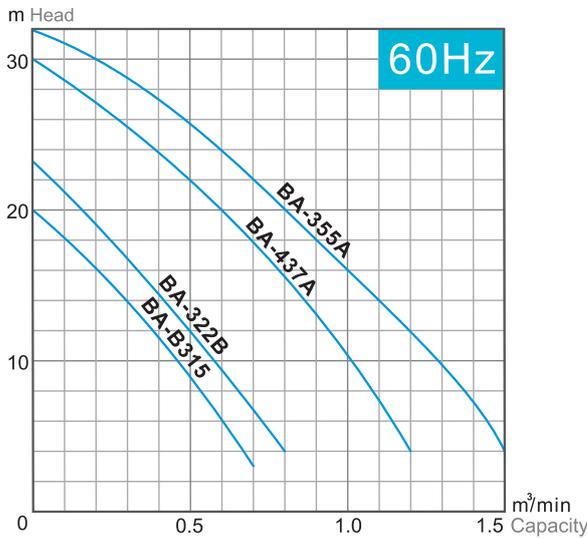

**SPECIFICATIONS**

2P-3600RPM

Model	Output Hp (kW)	Discharge inch	Phase $\phi$	Standards		Length mm	Width mm	Height mm	Weight kg
				Head m	Capacity m³/min				
BA-B315	2 (1.5)	3"	(1 $\phi$ 220v)/ 3 $\phi$	9	0.5	360	220	570/490	41/37.5
BA-322B	3 (2.2)	3"	3 $\phi$	12	0.5	420	240	550	40
BA-437A	5 (3.7)	3"/4"	3 $\phi$	22	0.5	440	255	560	55
BA-355A	7½ (5.5)	3"/4"	3 $\phi$	26	0.5	470	250	570	60
BA-475A	10 (7.5)	4"	3 $\phi$	25	1.0	560	310	690	105
BA-4110	15 (11)	4"	3 $\phi$	34	1.0	560	310	720	115