



**INSTALLING STEPS**

1. Low power consumption, time saving and space saving for installation, portable and light weight design.
2. Dual SIC mechanical seals are adopted for high wear-resistance and durability. 3 Patented Design of Rotary Sprinkler for produces fine water splash to higher and more extensive area, cover up to 6m diameter.
4. Multi-function designed, can be used individually as dewatering pump, aerator or landscape.

**Introductions of Accessories**



Fixed sprinkling plate



Rotary sprinkling plate (Optional)



RP-416




KP-409

Pump



3 pieces coupled floater

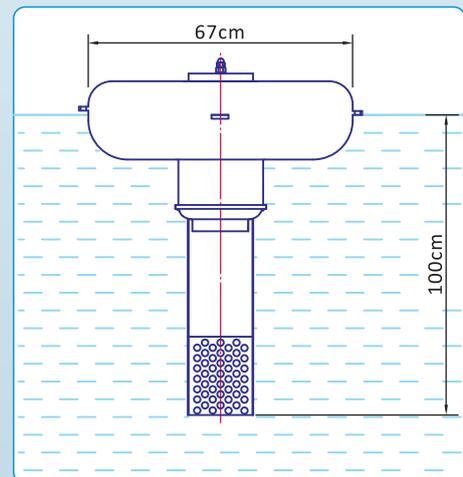

Extended tube for water inlet is available (customised)

**SPECIFICATIONS**

2P-3600RPM

Model	Output Hp(KW)	Voltage	Material	Weight kg	Cable m
RP-409	1 (0.75)	(1 ϕ 220v)/ 3 ϕ	SUS+FC	36	20
RP-416	2 (1.5)	3 ϕ 200~460V	SUS+FC	44	20
KP-409	1 (0.75)	(1 ϕ 220v)/ 3 ϕ	SUS	37	20

※ Weight: including floater.