

- **APPLICATIONS:** 1. Pumping Station.
2. Agriculture irrigation, drainage of fishing pond, aqua farm, subway and large flow capacity in industries, flood control...etc.
***Above head of 5 meters is applicable.**




BLS-815



BLS-808

■ **FEATURES**

1. Motor frame and casing are made of stainless steel and water-cooling jacket design increases efficiency of heat diffusion.
2. Stainless steel shaft is calibrated in dynamic balance test. Dual mechanical seal SIC/SIC are fitted and dual oil seals design raises effects of dust-proof.
3. Mix flow design to meet large flow capacity, energy saving and easy installation.
4. Inner cable wires and cable base are upgraded by filling EPOXY to raise humidity-resistance.
5. BLS is the range for particular purpose of pumping station, and for both two uses of water delivery and extraction.

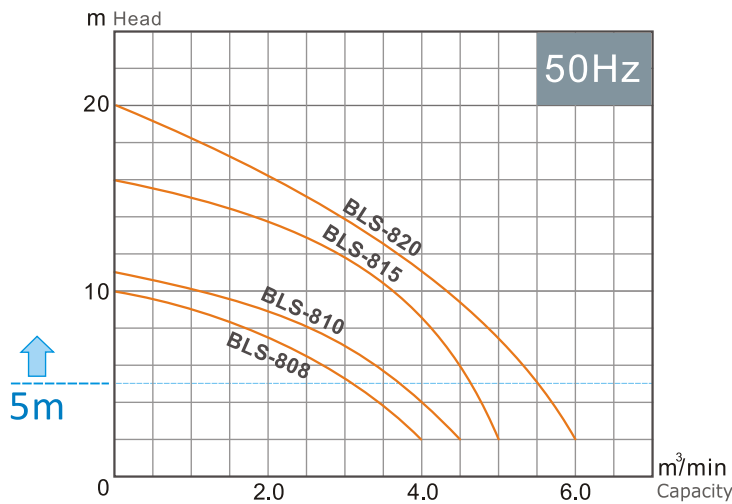

SPECIFICATIONS

4P-1500RPM

Model	Output Hp (kW)	Discharge inch	Phase ϕ	Standards		Max Diameter mm	Height mm	Weight kg
				Head m	Capacity m³/min			
BLS-808	7½ (5.5)	8"	3 ϕ	5.5	2.8	330	920	110
BLS-810	10 (7.5)	8"	3 ϕ	7	3.0	380	950	140
BLS-815	15 (11)	8"	3 ϕ	7	4.0	380	970	150
BLS-820	20 (15)	8"	3 ϕ	10	4.0	430	1010	180