

BFS Series Sewage / Wastewater Pump

Applications: Drain accumulated water and wastewater from husbandry, industry, basement, food factory...etc.



BFS-315



BFS-322




BFS-437



BFS-355



Stainless Steel Impeller

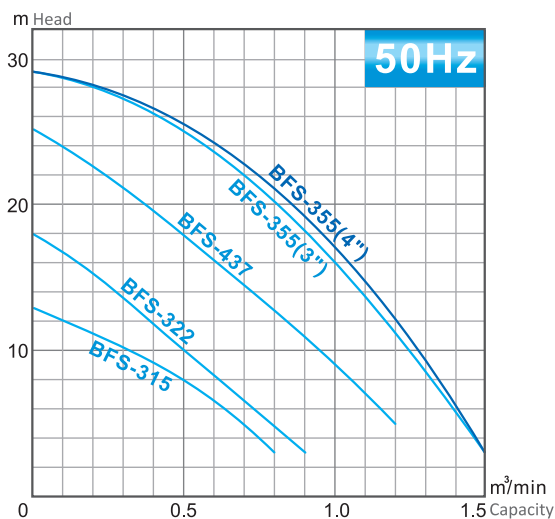

Spec. / Model		BFS-315	BFS-322	BFS-437	BFS-355
Discharge		80mm			80/100mm
Liquid		Sewage and Wastewater			
Temp.		0~40°C			
Motor	Freq. / Voltage	50Hz / 200V~460V			
	Motor type	Dry Motor			
	Pole	2P			
	Protect	AC Protector			
Pump	Shaft	SUS410			
	Mech. Seal	SIC / SIC			
	Impeller	Stainless Steel			
	Pump Housing	FC-20			

SPECIFICATIONS

Model	Output Hp(kW)	Discharge inch	Phase ϕ	Standard		Free Passage mm	Length mm	Width mm	Height mm	Weight kg
				Head m	Capacity m³/min					
BFS-315	2 (1.5)	3"	3 ϕ	8	0.5	20	400	240	500	48
BFS-322	3 (2.2)	3"	3 ϕ	10	0.5	20	400	240	520	55
BFS-437	5 (3.7)	3"	3 ϕ	18	0.5	25	500	260	560	62
BFS-355	7½ (5.5)	3"	3 ϕ	25	0.5	30	500	260	590	67
BFS-355	7½ (5.5)	4"	3 ϕ	17	1	30	500	260	590	67