

■ **APPLICATIONS:** Drainage of food market, animal husbandry and water refining tank. Water treatment of wastewater plant, drainage of basement, food industry and various industrial wastewater...etc.

■ **FEATURES**

1. Built-in protection device for prevent the motor from overheating or overload.
 2. Vortex type Impeller designed for handling light solid pass through non-blockly
 3. Motor frame, shaft and screws are made of high strength stainless-steel; dual mechanical seals are adopted to providing long service life (above 3Hp)
 4. Inner cable wires and cable base are upgraded by filling EPOXY to raise humidity-resistance.
- Float switch is available for model under 2Hp.



BAF-205



BAF-208




BAF-355A



AC Protector



Non-clogging Impeller

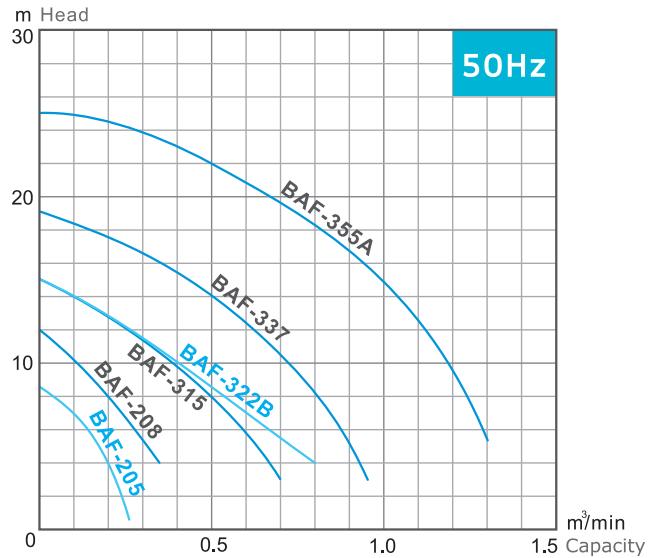

SPECIFICATIONS

2P-3000RPM

Model	Power Hp (kW)	Discharge inch	Phase ϕ	Standards		Free Passage mm	Length mm	Width mm	Height mm	Weight kg
				Head m	Capacity m ³ /min					
BAF-205	0.5kW	2"	(1 ϕ 220v)/ 3 ϕ	6	0.14	35	220	150	370	15
BAF-208	1½ (1.1)	2"	(1 ϕ 220v)/ 3 ϕ	8	0.2	35	250	170	470	23
BAF-315	2 (1.5)	3"	(1 ϕ 220v)/ 3 ϕ	8	0.5	40	400	220	590/500	41/37
BAF-322B	3 (2.2)	3"	3 ϕ	10	0.4	45	420	240	550	41
BAF-337	5 (3.7)	3"	3 ϕ	14	0.5	55	430	250	530	50
BAF-355A	7½ (5.5)	3"/4"	3 ϕ	22	0.5	55	470	250	550	55