



Exclusive Use in High-Technology electronic industries.

**APPLICATIONS:**

1. Drainage of food market, animal husbandry and water refining tank. Water treatment of wastewater plant, drainage of basement, food industries, leather industries, pulp and paper industries, dyeing industries, steel industries, and various industrial wastewater...etc.
2. Wastewater treatment of chemical industries, medical industries, hospital, laboratory and other comprehensive wastewater treatment...etc.





**KF4-437**



**KF-830**

**FEATURES**

1. Stainless Steel 304/316 materials are adopted for corrosive-resistance.
2. High efficient motor is adopted, shaft and rotor are machining precisely to raise stability. Serious quality control and high class of insulation are provided for long time operation and service life.
3. Dependable dual mechanical seals are adopted for high wear and heat resistance, and to maintain long life.
4. Impeller is designed for special water flow and big capacity of pump housing to meet dependable performance, and high efficiency for various wastewater.
5. Inner cable wires and cable base are upgraded by filling EPOXY to raise humidity-resistance.
6. Overload protector is available (option).

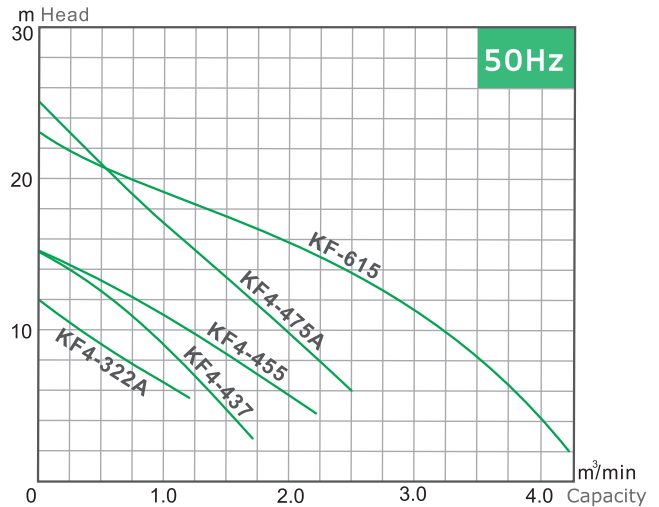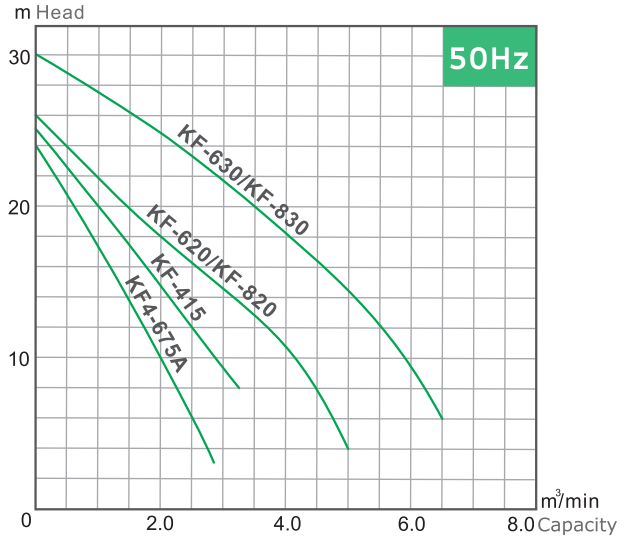

**SPECIFICATIONS**

4P-1500RPM

Model	Power Hp (kW)	Discharge inch	Phase $\phi$	Start Method	Standards		Free Passage mm	Length mm	Width mm	Height mm	Weight kg
					Head m	Capacity m³/min					
KF4-322A	3 (2.2)	3"	3 $\phi$	Direct	9	0.5	40	560	300	580	80
KF4-437	5 (3.7)	4"	3 $\phi$	Direct	9	1.0	40	560	300	650	96
KF4-455	7½ (5.5)	4"	3 $\phi$	Direct	11	1.0	30	600	360	710	105
KF4-475A	10 (7.5)	4"	3 $\phi$	Direct	17	1.0	40	720	430	730	154
KF4-675A	10 (7.5)	6"	3 $\phi$	Direct	10	2.0	45	770	430	730	184
KF-415	15 (11)	4"	3 $\phi$	Y- $\Delta$	20	1.0	45	730	430	900	200
KF-615	15 (11)	6"	3 $\phi$	Y- $\Delta$	17	1.7	45	940	480	950	235
KF-620	20 (15)	6"	3 $\phi$	Y- $\Delta$	18	2.0	55	940	480	950	245
KF-820	20 (15)	8"	3 $\phi$	Y- $\Delta$	13	3.5	60	950	480	990	270
KF-630	30 (22)	6"	3 $\phi$	Y- $\Delta$	25	2.0	55	940	480	1000	280
KF-830	30 (22)	8"	3 $\phi$	Y- $\Delta$	20	3.5	60	950	480	1000	300