

■ **APPLICATIONS:** Drainage of livestock industry and water refining tank, water treatment of wastewater plant, drainage of basement, food industry and various industrial wastewater...etc.



BAF-205



BAF-322B

■ **FEATURES**

1. Built-in protection device for prevent the motor from overheating or overload.
 2. Vortex type Impeller designed for handling light solid pass through non-blockly
 3. Motor frame, shaft and screws are made of high strength stainless-steel; dual mechanical seals are adopted to providing long service life (above 3Hp)
 4. Inner cable wires and cable base are upgraded by filling EPOXY to raise humidity-resistance.
- Float switch is available for model under 2Hp.




BAF-208



BAF-355A



Non-clogging Impeller

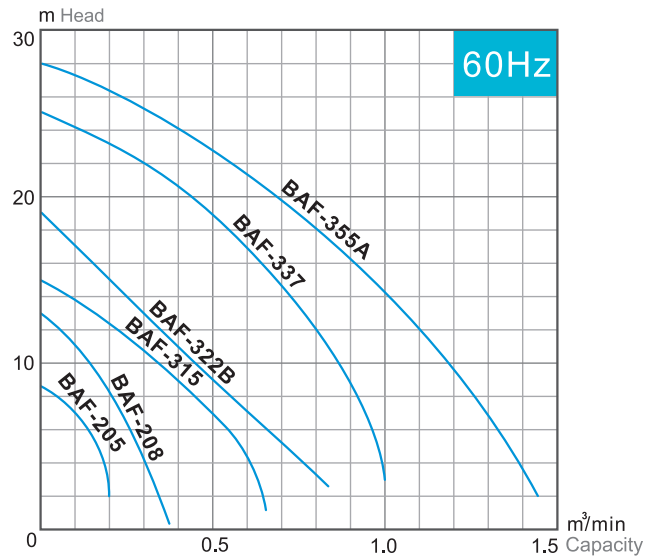

SPECIFICATIONS

2P-3600RPM

Model	Output Hp (kW)	Discharge inch	Phase ϕ	Standards		Free Passage mm	Length mm	Width mm	Height mm	Weight kg
				Head m	Capacity m³/min					
BAF-205	(0.5)	2"	(1 ϕ 220v)/ 3 ϕ	6	0.14	30	220	150	370	14.5
BAF-208	1½ (1.1)	2"	(1 ϕ 220v)/ 3 ϕ	8	0.2	35	250	170	470	23/21.5
BAF-315	2 (1.5)	3"	(1 ϕ 220v)/ 3 ϕ	7	0.5	40	400	220	590/500	41/37
BAF-322B	3 (2.2)	3"	3 ϕ	9	0.5	45	420	240	550	40
BAF-337	5 (3.7)	3"	3 ϕ	19	0.5	55	430	250	530	50
BAF-355A	7½ (5.5)	3¾"	3 ϕ	22	0.5	55	470	250	550	55