


■ **APPLICATIONS:** Drainage of construction site and subway, flood control/prevention of public construction, irrigation, water circulation of aquaculture and landscape pond...etc.



Impeller made of stainless steel

■ **FEATURES**

1. High Strength Stainless-steel made of shaft and impeller are installed.
2. High quality protector adopted on dry type motor to raising effective protection.
3. Cable base upgraded by filling EPOXY to raise humidity-resistance.
4. All products are made in Taiwan with high quality.

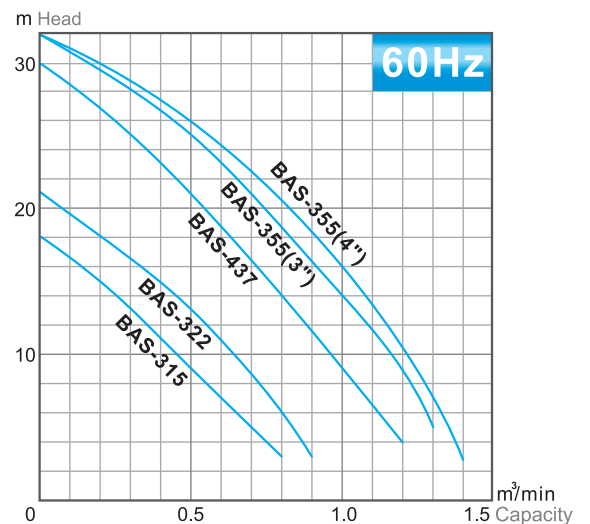

SPECIFICATIONS

2P-3600RPM

Model	Output Hp (kW)	Discharge inch	Phase ϕ	Standards		Free Passage mm	Length mm	Width mm	Height mm	Weight kg
				Head m	Capacity m³/min					
BAS-315	2 (1.5)	3"	3 ϕ	9	0.5	10	380	240	500	48
BAS-322	3 (2.2)	3"	3 ϕ	12	0.5	10	380	240	520	55
BAS-437	5 (3.7)	3"	3 ϕ	20	0.55	10	500	260	560	62
BAS-355	7½ (5.5)	3"	3 ϕ	25	0.5	10	500	260	590	67
BAS-355	7½ (5.5)	4"	3 ϕ	16	1	10	500	260	590	67