

■ **APPLICATIONS:** Drainage of construction site and subway, flood control/prevention of public construction, irrigation, water circulation of aquaculture and landscape pond...etc.



BFS-315



BFS-322





BFS-355



BCF-355



Impeller made of stainless steel

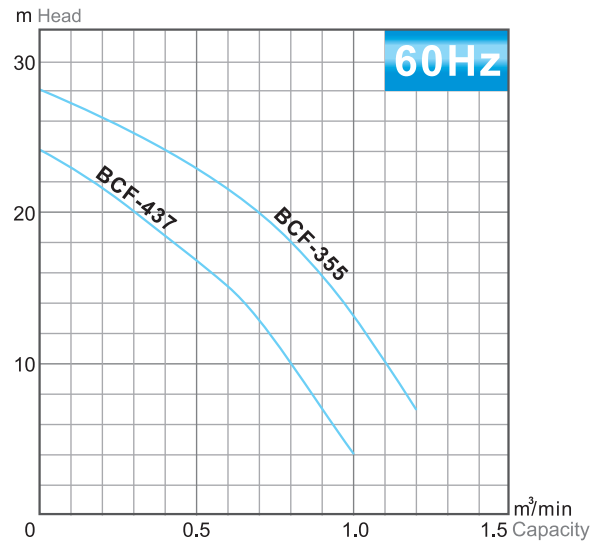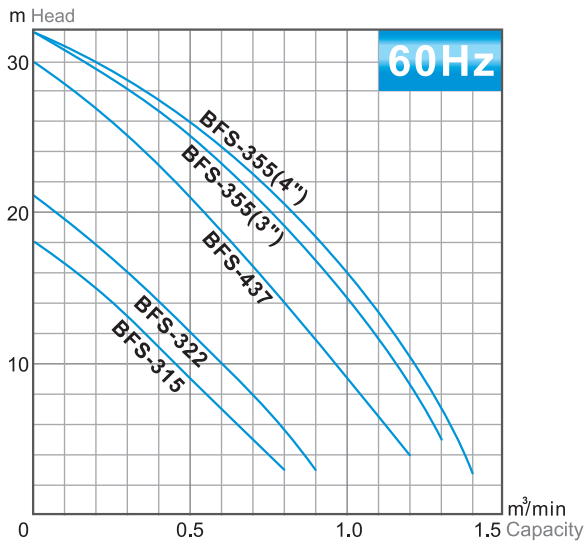

SPECIFICATIONS

2P-3600RPM

Model	Output Hp (kW)	Discharge inch	Phase ϕ	Standards		Free Passage mm	Length mm	Width mm	Height mm	Weight kg
				Head m	Capacity m ³ /min					
BFS-315	2 (1.5)	3"	3 ϕ	9	0.5	20	400	240	500	48
BFS-322	3 (2.2)	3"	3 ϕ	12	0.5	20	400	240	520	55
BFS-437	5 (3.7)	3"	3 ϕ	20	0.55	25	500	260	560	62
BFS-355	7½ (5.5)	3"	3 ϕ	25	0.5	30	500	260	590	67
BFS-355	7½ (5.5)	4"	3 ϕ	16	1	30	500	260	590	67
BCF-437	5 (3.7)	3"	3 ϕ	15	0.6	60	500	260	550	62
BCF-355	7½ (5.5)	3"-4"	3 ϕ	18	0.8	65	500	260	580	67