

**APPLICATIONS:** Lifting of water and underground water, aqua farm, agriculture irrigation, hydraulic engineering and drainage of subway...etc.

**\*Below head of 15 meters is applicable.**





**BH-422**

**BH-437A**

**FEATURES**

1. Two features (Water delivery and extraction) in one design can be applied as a landed water pump by removing strainer and connecting a check valve.
2. Water-cooling jacket design prevents overheat after long time operation, and impeller is designed regards to slicing concept for high water volume.
3. Motor frame and outer cover are made of stainless steel.

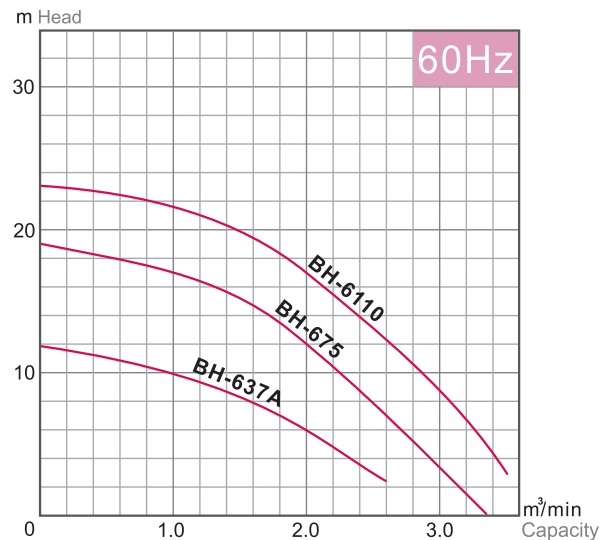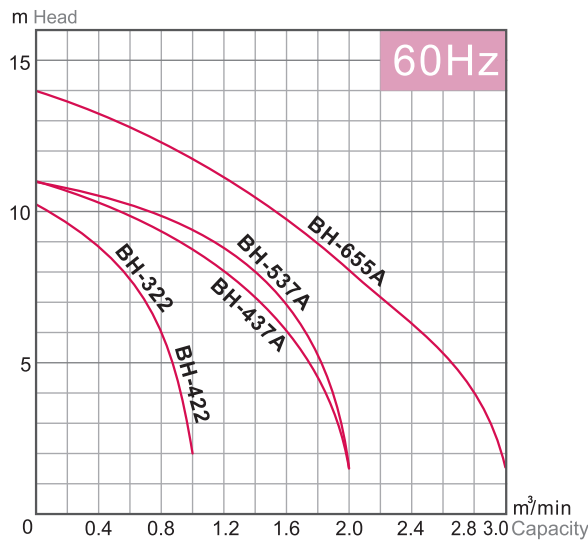

**SPECIFICATIONS**

4P-1800RPM

Model	Output Hp (kW)	Discharge inch	Phase $\phi$	Standards		Max Diameter mm	Height mm	Weight kg
				Head m	Capacity m³/min			
BH-322	3 (2.2)	3"	3 $\phi$	6	0.8	245	530	47
BH-422	3 (2.2)	4"	3 $\phi$	6	0.8	245	530	47
BH-437A	5 (3.7)	4"	3 $\phi$	8	1.2	270	680	70
BH-537A	5 (3.7)	5"	3 $\phi$	8	1.3	270	680	70
BH-637A	5 (3.7)	6"	3 $\phi$	6	2.0	290	815	75
BH-655A	7½ (5.5)	6"	3 $\phi$	8	2.0	290	920	85
BH-675	10 (7.5)	6"	3 $\phi$	12	2.0	380	970	122
BH-6110	15 (11)	6"	3 $\phi$	17	2.0	380	1000	130