

■ **APPLICATIONS:** Drainage of basement, food market and livestock industry, and water treatment of wastewater plant, water refining tank and other industrial wastewater...etc.



BF-208A





BF-B315



BF-355A

■ FEATURES

1. Dependable laminated sheet of Si steel is adopted to motor; shaft and rotor are machining precisely to raise stability and efficiency of motor. Motor frame, shaft, screws are made of stainless steel to provide long service life and attractive appearance.
 2. Impeller is designed to special water flow, muddy liquid and other various wastewater can be efficiently drained.
 3. The product range is up to 15Hp, **dual SIC mechanical seals** are built in ($1\frac{1}{2}$ Hp and above).
 4. Inner cable wires and cable base are upgraded by filling EPOXY to raise humidity-resistance.
 5. Superior design to easily disassemble motor and pump housing for maintenance.
- Float switch is available for model under 2Hp.

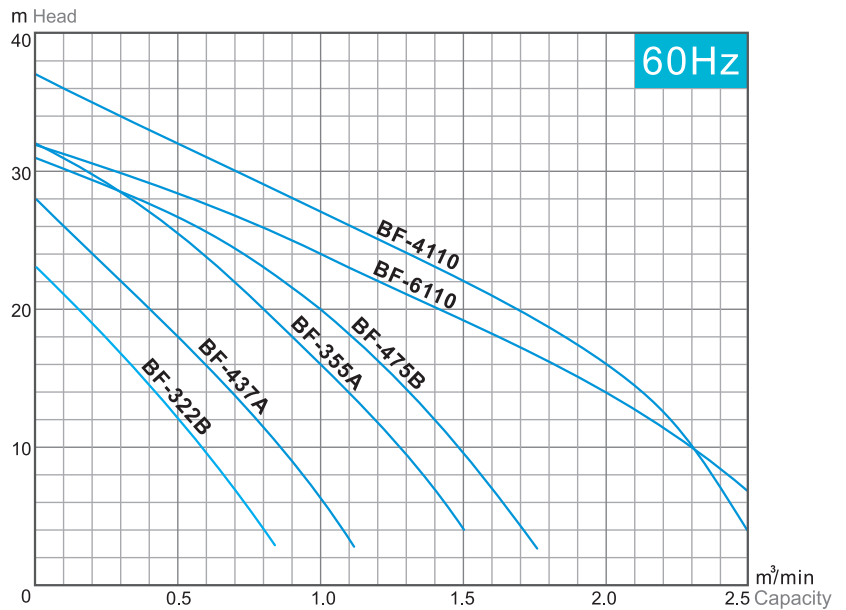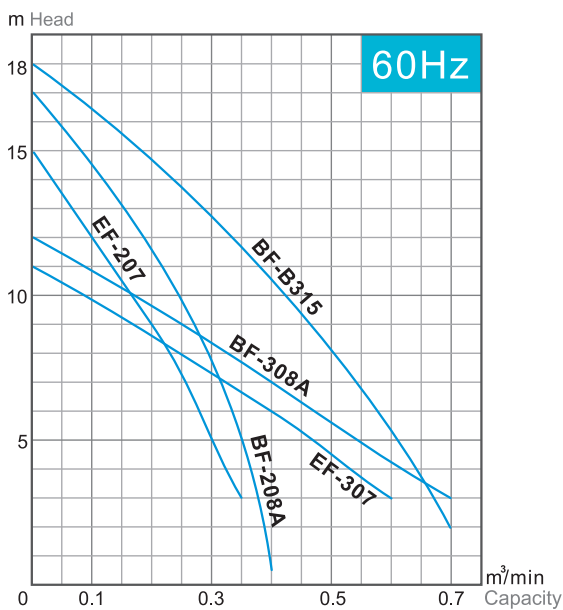

SPECIFICATIONS

2P-3600RPM

Model	Output Hp (kW)	Discharge inch	Phase ϕ	Standards		Free Passage mm	Length mm	Width mm	Height mm	Weight kg
				Head m	Capacity m ³ /min					
EF-207	1 (0.75)	2"	1 ϕ / 3 ϕ	9	0.2	12	260	210	460	19
EF-307	1 (0.75)	3"	1 ϕ / 3 ϕ	6	0.4	12	300	210	460	20
BF-208A	1 $\frac{1}{2}$ (1.1)	2"	(1 ϕ 220v) / 3 ϕ	12	0.2	15	260	210	480	24
BF-308A	1 $\frac{1}{2}$ (1.1)	3"	(1 ϕ 220v) / 3 ϕ	7	0.4	20	310	220	500	25
BF-B315	2 (1.5)	3"	(1 ϕ 220v) / 3 ϕ	8	0.5	20	370	230	590/530	41/38
BF-322B	3 (2.2)	3"	3 ϕ	12	0.5	30	420	240	550	41
BF-437A	5 (3.7)	3"/4"	3 ϕ	18	0.5	35	440	255	560	55
BF-355A	7 $\frac{1}{2}$ (5.5)	3"/4"	3 ϕ	26	0.5	35	470	250	570	60
BF-475B	10 (7.5)	4"	3 ϕ	20	1.0	40	560	310	700	92
BF-4110	15 (11)	4"	3 ϕ	27	1.0	40	560	310	730	110
BF-6110	15 (11)	6"	3 ϕ	14	2.0	40	590	310	730	115