

- **APPLICATIONS:**
1. Wastewater treatment of chemical industries, metal industries, medical industries...etc.
 2. Wastewater treatment of hospital and laboratory, dewatering of rugged construction and other comprehensive wastewater treatment...etc.




KA-315



KA-103A

■ **FEATURES**

1. Stainless steel 304/316 materials are adopted for corrosive-resistance.
 2. Chemical-resistant SIC mechanical seal and fluorine gasket are adopted to provide reliable sealing effects for chemical wastewater.
 3. Precision casting method is used and the weight is 25% less than same grades of other pumps.
 4. The base of cable is made out of integral plastic to upgrade humidity-resistance.
 5. Italian techniques and professional design are adopted for water-resistance.
- Float switch is available for model under 2Hp (except KA-205 3phase).

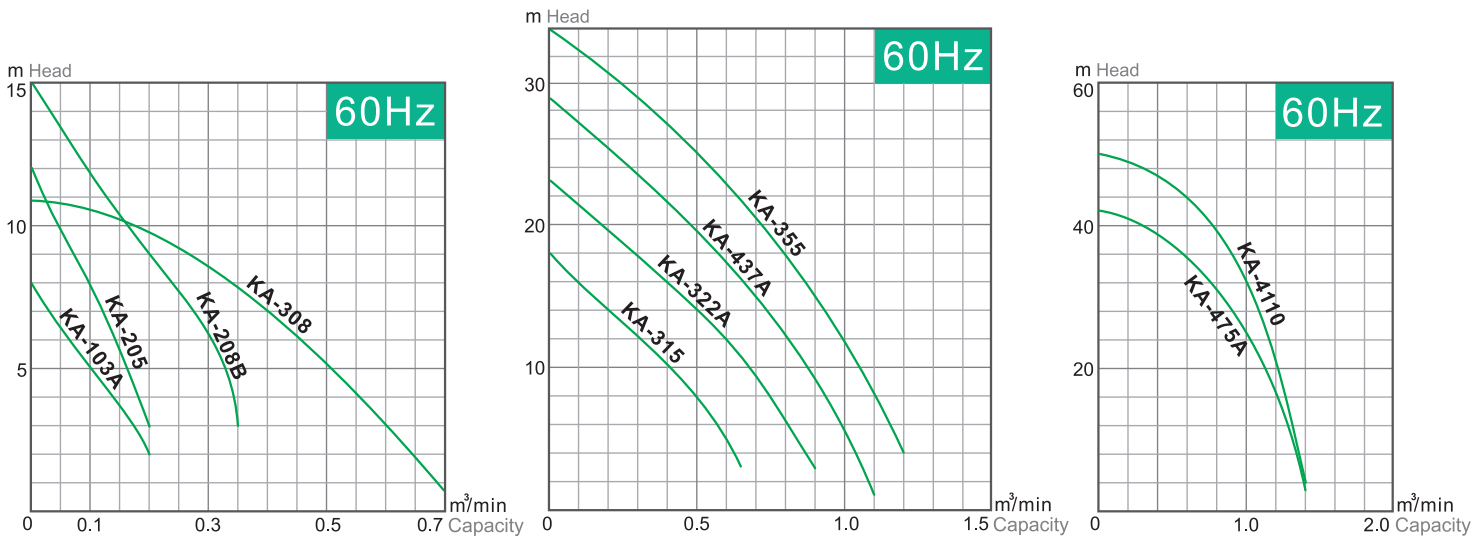

SPECIFICATIONS

2P-3600RPM

Model	Output Hp (kW)	Discharge inch	Phase ϕ	Standards		Length mm	Width mm	Height mm	Weight kg
				Head m	Capacity m ³ /min				
KA-103A	1/2 (0.4)	1 1/2"	1 ϕ	5	0.1	200	150	340	10
KA-205	1/2 (0.5)	2"	1 ϕ / 3 ϕ	7	0.12	230	160	345	14
KA-208B	1 (0.75)	2"	1 ϕ / 3 ϕ	9	0.2	250	180	440	18
KA-308	1 1/2 (1.1)	3"	(1 ϕ 220v) / 3 ϕ	7	0.4	300	180	480	22
KA-315	2 (1.5)	3"	(1 ϕ 220v) / 3 ϕ	8	0.5	300	200	535/480	35/30
KA-322A	3 (2.2)	3"	3 ϕ	14	0.5	430	255	550	49
KA-437A	5 (3.7)	3"/4"	3 ϕ	19	0.5	430	255	560	55
KA-355	7 1/2 (5.5)	3"/4"	3 ϕ	25	0.5	470	250	570	60
KA-475A	10 (7.5)	4"	3 ϕ	25	1.0	560	310	690	105
KA-4110	15 (11)	4"	3 ϕ	32	1.0	560	310	720	115