



Stainless Steel Sewage Pump

- APPLICATIONS:**
1. Wastewater treatment of chemical industries, metal industries, dyeing industries, medical industries, pulp and paper industries...etc.
 2. Wastewater treatment of hospital and laboratory, animal husbandry and other comprehensive wastewater treatment...etc.





KF-322A

KF-437A

FEATURES

1. Stainless steel 304/316 materials are adopted for corrosive-resistance.
 2. Chemical-resistant SIC mechanical seal and fluorine gasket are adopted to provide reliable sealing effects for chemical wastewater.
 3. Precision casting method is used and the weight is 25% less than same grades of other pumps.
 4. The base of cable is made out of integral plastic to upgrade humidity-resistance.
 5. Italian techniques and professional design are adopted for water resistance.
 6. The shaft is made of stainless steel and calibrated in dynamic balance for long time operation of bearing.
- Float switch is available for model under 2Hp (except KF-205 3phase).

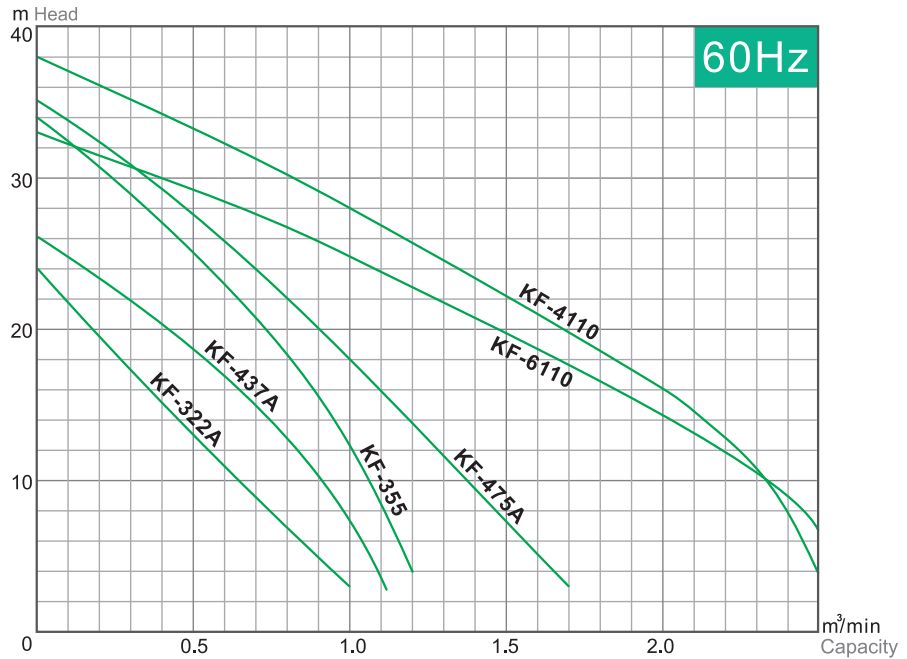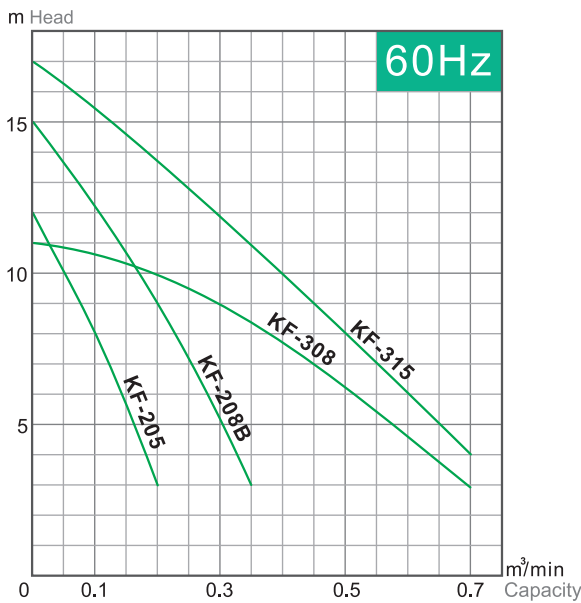

SPECIFICATIONS

2P-3600RPM

Model	Output Hp (kW)	Discharge inch	Phase ϕ	Standards		Free Passage mm	Length mm	Width mm	Height mm	Weight kg
				Head m	Capacity m ³ /min					
KF-205	1/2 (0.5)	2"	1 ϕ / 3 ϕ	7	0.12	10	230	160	345	14
KF-208B	1 (0.75)	2"	1 ϕ / 3 ϕ	9	0.2	12	260	210	440	19
KF-308	1½ (1.1)	3"	(1 ϕ 220v) / 3 ϕ	7	0.4	20	300	230	490	22
KF-315	2 (1.5)	3"	(1 ϕ 220v) / 3 ϕ	8	0.5	20	315	230	565/510	35/31
KF-322A	3 (2.2)	3"	3 ϕ	13	0.5	30	440	255	550	50
KF-437A	5 (3.7)	3"/4"	3 ϕ	19	0.5	35	440	255	560	53
KF-355	7½ (5.5)	3"/4"	3 ϕ	25	0.5	35	470	250	570	60
KF-475A	10 (7.5)	4"	3 ϕ	18	1.0	40	560	310	700	102
KF-4110	15 (11)	4"	3 ϕ	28	1.0	40	560	310	730	110
KF-6110	15 (11)	6"	3 ϕ	14	2.0	40	590	310	730	115