

- **APPLICATIONS:** Drainage of food market, animal husbandry and water refining tank.
Water treatment of wastewater plant, drainage of basement,
food industry and various industrial wastewater...etc.



BAF-205



BAF-208



BAF-355A




AC Protector



Non-clogging Impeller

■ FEATURES

1. Built-in protection device can prevent the motor from overheating or overload.
 2. Impeller is calibrated in balance test and non-block designed can handle liquid has constant characteristics such as small quantity of impurities and solids in wastewater.
 3. Motor Frame, shaft and screws are made of high strength stainless steel and dual mechanical seals are adopted to provide long service life.
 4. Inner cable wires and cable base are upgraded by filling EPOXY to raise humidity-resistance.
- Float switch is available for model under 2Hp.

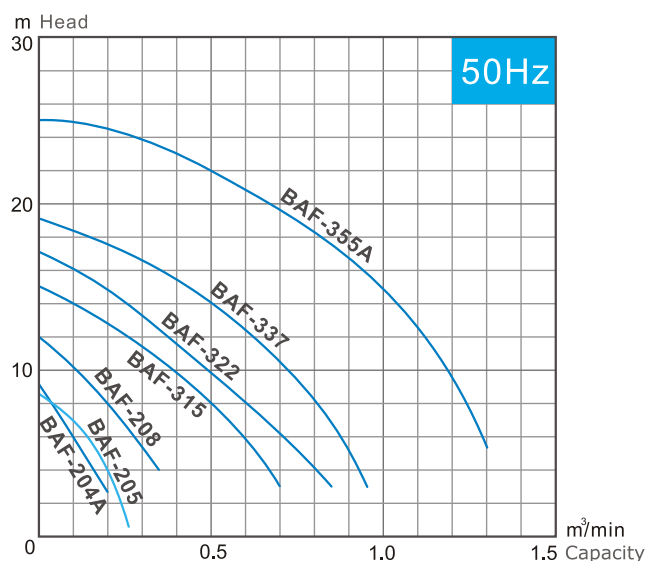

SPECIFICATIONS

2P-3000RPM

Model	Output Hp (kW)	Discharge inch	Phase ϕ	Standards		Free Passage mm	Length mm	Width mm	Height mm	Weight kg
				Head m	Capacity m ³ /min					
BAF-204A	1/2 (0.4)	2"	1 ϕ	6	0.1	30	220	145	350	10
BAF-205	0.5kW	2"	1 ϕ / 3 ϕ	6	0.14	35	220	150	370	10
BAF-208	1½ (1.1)	2"	(1 ϕ 220v)/ 3 ϕ	8	0.2	35	250	170	470	23/21.5
BAF-315	2 (1.5)	3"	(1 ϕ 220v)/ 3 ϕ	8	0.5	40	400	220	590/500	41/37
BAF-322	3 (2.2)	3"	3 ϕ	10	0.5	45	430	250	510	45
BAF-337	5 (3.7)	3"	3 ϕ	14	0.5	55	430	250	530	50
BAF-355A	7½ (5.5)	3"/4"	3 ϕ	22	0.5	55	470	250	550	55