

■ **APPLICATIONS:** Drainage of basement, food market and animal husbandry, water treatment of wastewater plant, drainage of water refining tank and drainage of various industrial wastewater...etc.





BF-208A

BF-B315

BF-355A

### ■ FEATURES

1. Dependable laminated sheet of Si steel is adopted to motor; shaft and rotor are machining precisely to raise stability and efficiency of motor. Motor frame, shaft, screws are made of stainless steel to provide long service life and attractive appearance.
  2. Impeller is designed to special water flow, muddy liquid and other various wastewater can be efficiently drained.
  3. The product range is up to 15Hp, **dual SIC mechanical seals** are built in (**1½ Hp** and above).
  4. Inner cable wires and cable base are upgraded by filling EPOXY to raise humidity-resistance.
  5. Superior design to easily disassemble motor and pump housing for maintenance.
- **Float switch is available for model under 2Hp.**

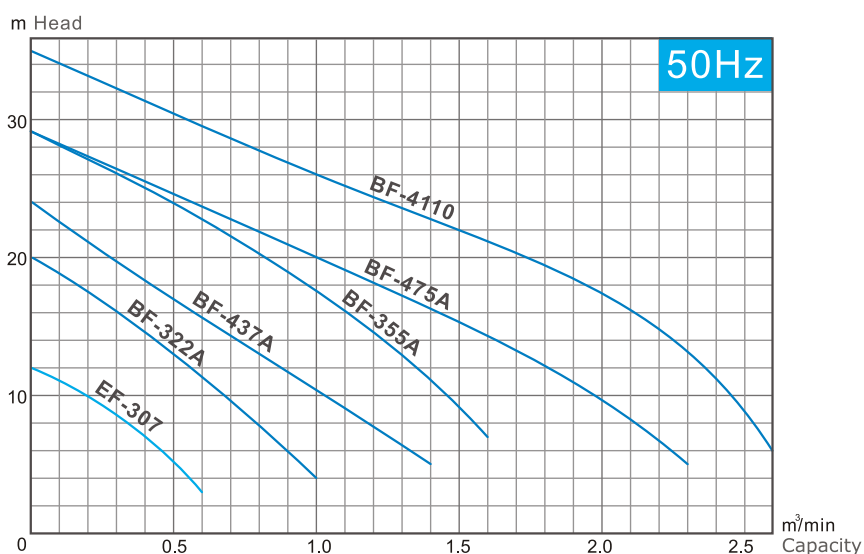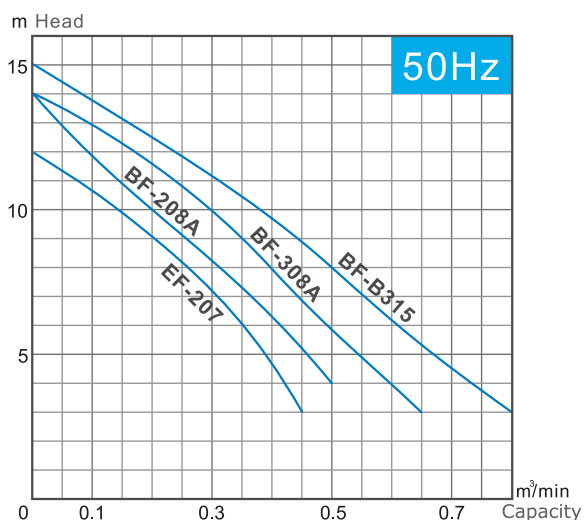

## SPECIFICATIONS

2P-3000RPM

Model	Output Hp (kW)	Discharge inch	Phase $\phi$	Standards		Free Passage mm	Length mm	Width mm	Height mm	Weight kg
				Head m	Capacity m³/min					
EF-207	1 (0.75)	2"	1 $\phi$ / 3 $\phi$	9	0.2	12	260	210	460	19
EF-307	1 (0.75)	3"	1 $\phi$ / 3 $\phi$	6.5	0.4	12	300	210	460	20
BF-208A	1½ (1.1)	2"	(1 $\phi$ 220v) / 3 $\phi$	10	0.2	15	260	210	480	24
BF-308A	1½ (1.1)	3"	(1 $\phi$ 220v) / 3 $\phi$	8	0.4	20	310	220	500	25
BF-B315	2 (1.5)	3"	(1 $\phi$ 220v) / 3 $\phi$	8	0.5	20	370	230	590/530	41/38
BF-322A	3 (2.2)	3"	3 $\phi$	13	0.5	30	440	255	550	49
BF-437A	5 (3.7)	3"/4"	3 $\phi$	17	0.5	35	440	255	560	51/52
BF-355A	7½ (5.5)	3"/4"	3 $\phi$	24	0.5	35	470	250	570	60
BF-475A	10 (7.5)	4"	3 $\phi$	20	1.0	40	560	310	700	102
BF-4110	15 (11)	4"	3 $\phi$	26	1.0	40	560	310	730	110