



- **APPLICATIONS:**
1. Wastewater treatment of chemical industries, metal industries, dyeing industries, medical industries, pulp and paper industries...etc.
  2. Wastewater treatment of hospital and laboratory, animal husbandry and other comprehensive wastewater treatment...etc.

**KF-208B****KF-322A****KF-475A**

## FEATURES

1. Stainless steel 304/316 materials are adopted for corrosive-resistance.
2. Chemical-resistant SIC mechanical seal and fluorine gasket are adopted to provide reliable sealing effects for chemical wastewater.
3. Precision casting method is used and the weight is 25% less than same grades of other pumps.
4. The base of cable is made out of integral plastic to upgrade humidity-resistance.
5. Italian techniques and professional design are adopted for water resistance.
6. The shaft is made of stainless steel and calibrated in dynamic balance for long time operation of bearing.

● Float switch is available for model under 2Hp (except KF-205 3phase).

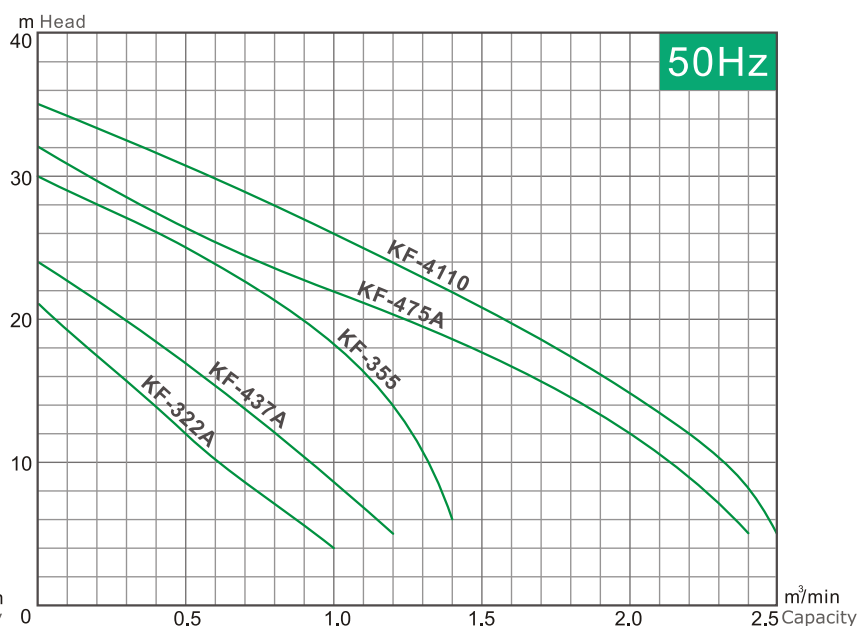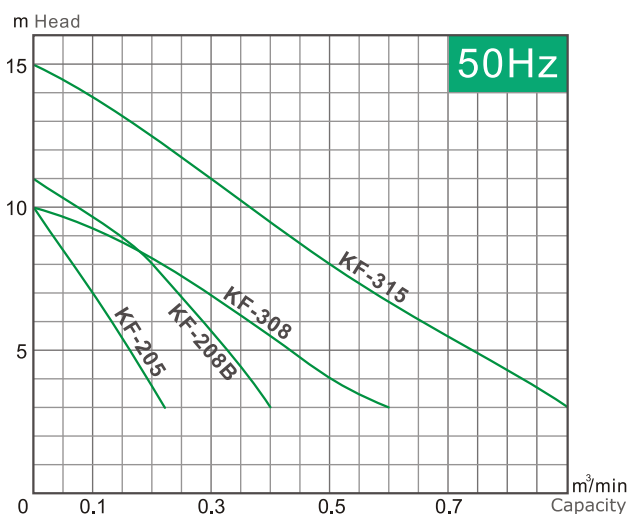

## SPECIFICATIONS

2P-3000RPM

Model	Output Hp (kW)	Discharge inch	Phase $\phi$	Standards		Length mm	Width mm	Height mm	Weight kg
				Head m	Capacity m³/min				
KF-205	0.5kW	2"	1 $\phi$ / 3 $\phi$	7	0.1	230	160	345	14
KF-208B	1 (0.75)	2"	1 $\phi$ / 3 $\phi$	8	0.2	260	210	440	19
KF-308	1½ (1.1)	3"	(1 $\phi$ 220v) / 3 $\phi$	5.5	0.4	300	230	490	22
KF-315	2 (1.5)	3"	(1 $\phi$ 220v) / 3 $\phi$	8	0.5	315	230	565/510	35/31
KF-322A	3 (2.2)	3"	3 $\phi$	12	0.5	440	255	550	50
KF-437A	5 (3.7)	3"/4"	3 $\phi$	17	0.5	440	255	560	53
KF-355	7½ (5.5)	3"/4"	3 $\phi$	25	0.5	470	250	570	60
KF-475A	10 (7.5)	4"	3 $\phi$	22	1.0	560	310	700	93
KF-4110	15 (11)	4"	3 $\phi$	26	1.0	560	310	730	110