

BAS Series Wastewater Pump

Applications: Water drainage for Civil engineering, Building, Engineering, Sewer, Agriculture, Fishery, Animal husbandry...etc.



BAS-315



BAS-322




BAS-437



BAS-355



Stainless Steel Impeller

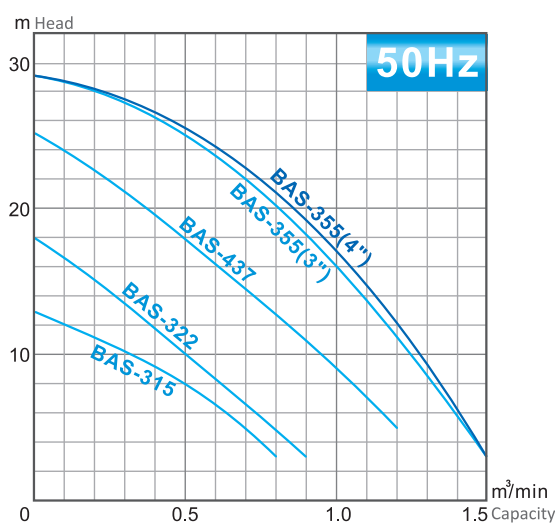

Spec. / Model	BAS-315	BAS-322	BAS-437	BAS-355
Discharge	80mm			80/100mm
Liquid	Sewage and Wastewater			
Temp.	0~40°C			
Motor	Freq. / Voltage			
	50Hz / 200V~460V			
	Motor type			
	Dry Motor			
Pump	Pole			
	2P			
	Protect			
	AC Protector			
	Shaft			
SUS410				
Mech. Seal				
SIC / SIC				
Impeller				
Stainless Steel				
Pump Housing				
FC-20				

SPECIFICATIONS

Model	Output Hp(kW)	Discharge inch	Phase ϕ	Standard		Free Passage mm	Length mm	Width mm	Height mm	Weight kg
				Head m	Capacity m³/min					
BAS-315	2 (1.5)	3"	3 ϕ	8	0.5	10	380	240	500	48
BAS-322	3 (2.2)	3"	3 ϕ	10	0.5	10	380	240	520	55
BAS-437	5 (3.7)	3"	3 ϕ	18	0.5	10	500	260	560	62
BAS-355	7½ (5.5)	3"	3 ϕ	25	0.5	10	500	260	590	67
BAS-355	7½ (5.5)	4"	3 ϕ	17	1	10	500	260	590	67



SONHO PUMP MANUFACTURING CO., LTD.

<http://www.sonho.com.tw> E-mail: sonho@sonho.com.tw

TEL: +886-8-7559933

FAX: +886-8-7557575



Made In Taiwan